

## SHXP-10G-SR

### 10Gb/s XFP Transceiver Hot Pluggable, Duplex LC, +3.3V, 850nm VCSEL/PIN, Multi mode,300m, 0~70°C/-40~ +85°C

SHXP-10G-SR inter-converting the 10Gb/s serial electrical data stream with the 10Gb/s optical signal, complies with the current XFP Multi-Source Agreement (MSA) Specification. It provides Digital diagnostics functions via a 2-wire serial interface. The high-performance 850nm VCSEL transmitter and high-sensitivity PIN receiver provide superior performance for Ethernet applications up to link length of 300m on Multi-mode fiber.

#### ■ Features:

- ◇ Supports 9.95 to 11.3Gb/s bit rates
- ◇ Hot pluggable 30 pin connector
- ◇ Duplex LC connector
- ◇ 850nm VCSEL transmitter, PIN photo-detector
- ◇ MMF links up to 300m
- ◇ 2-wire interface for management and diagnostic monitor
- ◇ Compliant with XFP MSA
- ◇ XFI electrical interface with AC coupling
- ◇ Single power supply voltages : +3.3V
- ◇ Power dissipation: <1.5W
- ◇ Commercial Temperature Range: 0~ 70°C
- ◇ Industrial Temperature Range: -40~ +85°C
- ◇ RoHS Compliant Part



#### ■ Applications:

- ◇ 10GBASE-SR/SW Ethernet
- ◇ 1200-Mx-SN-I 10G Fibre Channel
- ◇ Other optical links

#### ■ Ordering Information:

Part Number	Data Rate	Distance	Wavelength	Laser	Fiber	DDM	Connector	Temperature
SHXP-10G-SR	10Gb/s	300m	850nm	VCSEL/PIN	MM	Yes	Duplex LC	0~ 70°C
SHXP-10G-SR-I	10Gb/s	300m	850nm	VCSEL/PIN	MM	Yes	Duplex LC	-40~ +85°C

#### SH LINK CO., LIMITED

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China

Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613

Fax: +86-755-82891849

Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)

Website: [www.buysfp.com](http://www.buysfp.com),

[www.shlinkco.com](http://www.shlinkco.com)

➤ **Absolute Maximum Ratings**

Parameter		Symbol	Min	Max	Unit
Storage Temperature		T <sub>s</sub>	-40	+85	°C
Case Operating Temperature	SHXP-10G-SR	T <sub>A</sub>	0	+70	°C
	SHXP-10G-SR-I		-40	+85	
Supply Voltage		V <sub>CC</sub>	-0.5	+4.0	V

➤ **Electrical Characteristics (T<sub>OP</sub> = 0 to 70°C)**

Parameter	Symbol	Min	Typ	Max	Unit	Note	
Supply Voltage	Vcc3	3.13		3.45	V		
Supply Current	Icc3			400	mA		
Module total power	P			1.5	W		
<b>Transmitter</b>							
Input differential impedance	Rin		100		Ω	1	
Differential data input swing	Vin,pp	150		820	mV		
Transmit Disable Voltage	VD	2.0		Vcc	V		
Transmit Enable Voltage	VEN	GND		GND+ 0.8	V		
Transmit Disable Assert Time	T <sub>off</sub>			100	ms		
Tx Enable Assert Time	T <sub>on</sub>			100	ms		
<b>Receiver</b>							
Differential data output swing	Vout,pp	300	500	850	mV		
Data output rise time	tr			35	ps	2	
Data output fall time	tf			35	ps	2	
LOS Fault	VLOS fault	Vcc – 0.5		VccHOST	V	3	
LOS Normal	VLOS norm	GND		GND+0.5	V	3	
Power Supply Rejection	PSR	See Note 4 below					4

Notes: 1. After internal AC coupling.

2. 20 – 80 %

3. Loss of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

4. Per Section 2.7.1. in the XFP MSA Specification.

➤ **Optical Parameters (T<sub>OP</sub> = 0 to 70°C)**

Parameter	Symbol	Min	Typ	Max	Unit	Note
<b>Transmitter</b>						
Operating Data Rate	BR	9.95		11.3	Gb/s	
Bit Error Rate	BER			10-12		
Maximum Launch Power	P <sub>MAX</sub>	-7.3		-1	dBm	1
Optical Wavelength	λ	840	850	860	nm	
Optical Extinction Ratio	ER	3.5			dB	
RMS Spectral Width	λ <sub>RMS</sub>			0.45	nm	
Sidemode Supression ratio	SSR <sub>min</sub>	30			dB	

**SH LINK CO., LIMITED**

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China

Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613

Fax: +86-755-82891849

Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)

Website: [www.buysfp.com](http://www.buysfp.com),


[www.shlinkco.com](http://www.shlinkco.com)

Rise/Fall Time (20%~80%)	Tr/Tf			35	ps	
Average Launch power of OFF Transmitter	POFF			-30	dBm	
Tx Jitter	Txj	Compliant with each standard requirements				
Optical Eye Mask		IEEE802.3ae				2
<b>Receiver</b>						
Operating Date Rate	BR	9.95		11.3	Gb/s	
Receiver Sensitivity	Sen			-11.1	dBm	2
Maximum Input Power	PMAX	0			dBm	2
Optical Center Wavelength	$\lambda$ C	840		860	nm	
Receiver Reflectance	Rrx			-12	dB	
LOS De-Assert	LOSD			-12	dBm	
LOS Assert	LOSA	-30			dBm	
LOS Hysteresis	LOSH	0.5		5	dB	


- Notes: 1. The optical power is launched into MMF.  
 2. Measured with a PRBS 2<sup>31</sup>-1 test pattern @10.3125Gbps BER<10<sup>-12</sup>.

➤ **Pin Assignment**

Diagram of Host Board Connector Block Pin Numbers and Name

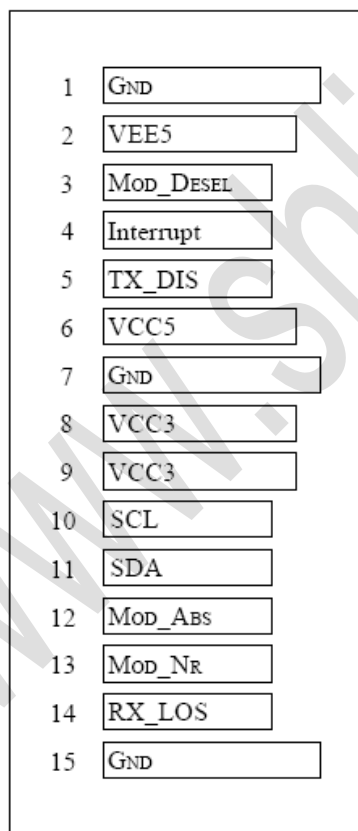

Bottom of Board  
(As view through top of board)

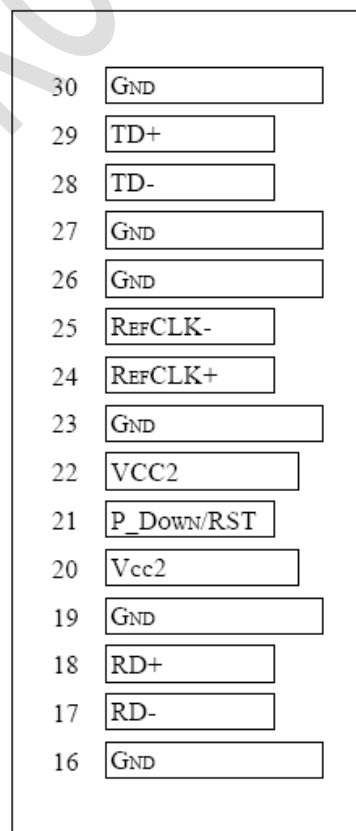

Top of Board

**SH LINK CO., LIMITED**

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China  
 Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613  
 Fax: +86-755-82891849 Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)  
 Website: [www.buysfp.com](http://www.buysfp.com), [www.shlinkco.com](http://www.shlinkco.com)

## ➤ Pin Function Definitions

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional –5.2 Power Supply – Not required	
3	LVTTL-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	LVTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTL- I/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Note: 1. Module circuit ground is isolated from module chassis ground within the module.

2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.

3. A Reference Clock input is not required.

**SH LINK CO., LIMITED**

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China

Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613

Fax: +86-755-82891849

Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)

Website: [www.buysfp.com](http://www.buysfp.com),

[www.shlinkco.com](http://www.shlinkco.com)

➤ **Digital Diagnostic Functions**


As defined by the XFP MSA 1, SH's XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- ✓ Transceiver temperature
- ✓ Laser bias current
- ✓ Transmitted optical power
- ✓ Received optical power
- ✓ Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.


For more detailed information including memory map definitions, please see the XFP MSA Specification.

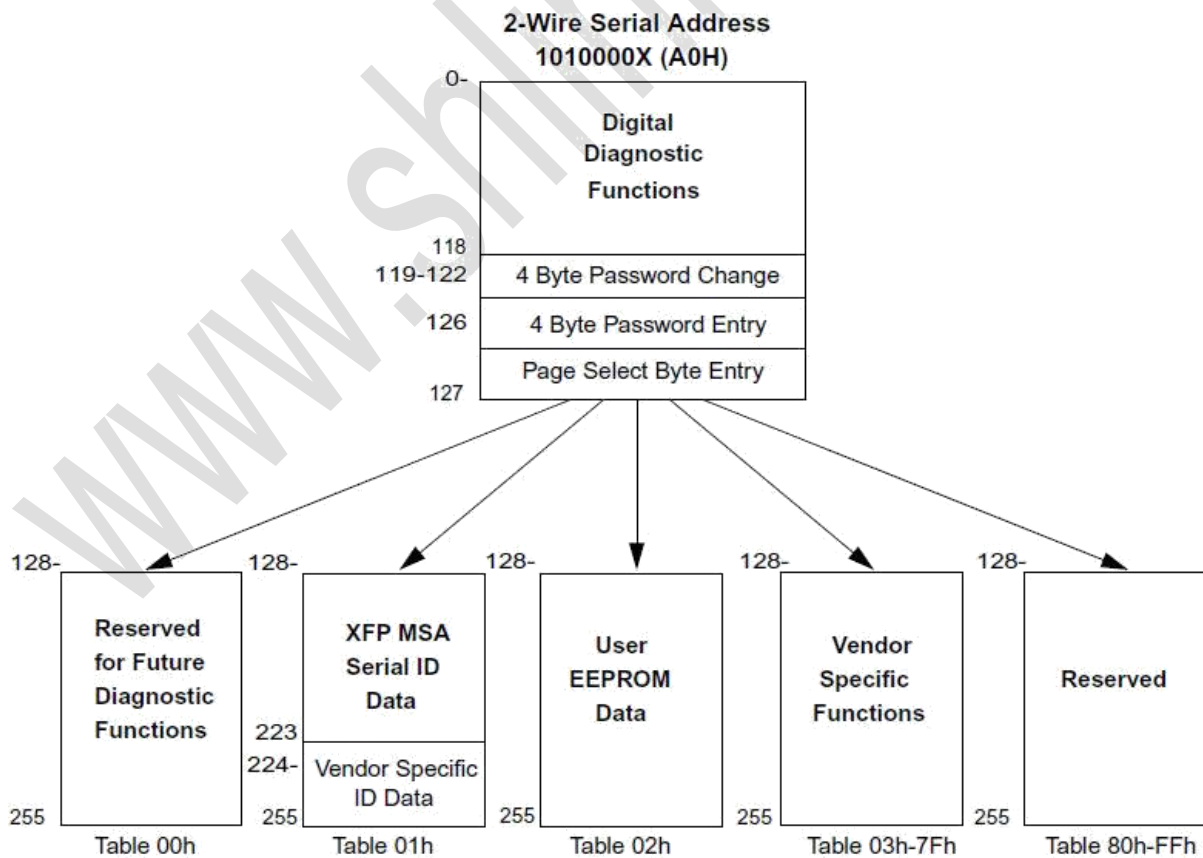


**SH LINK CO., LIMITED**

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China  
 Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613  
 Fax: +86-755-82891849      Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)  
 Website: [www.buysfp.com](http://www.buysfp.com),      [www.shlinkco.com](http://www.shlinkco.com)

➤ Recommended Circuit

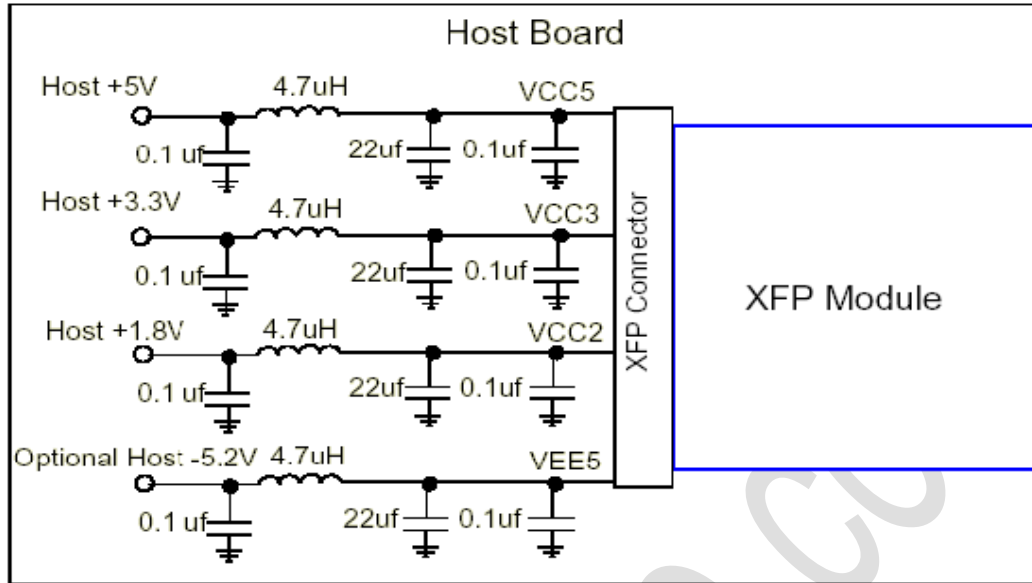

Recommended Host Board Power Supply Circuit

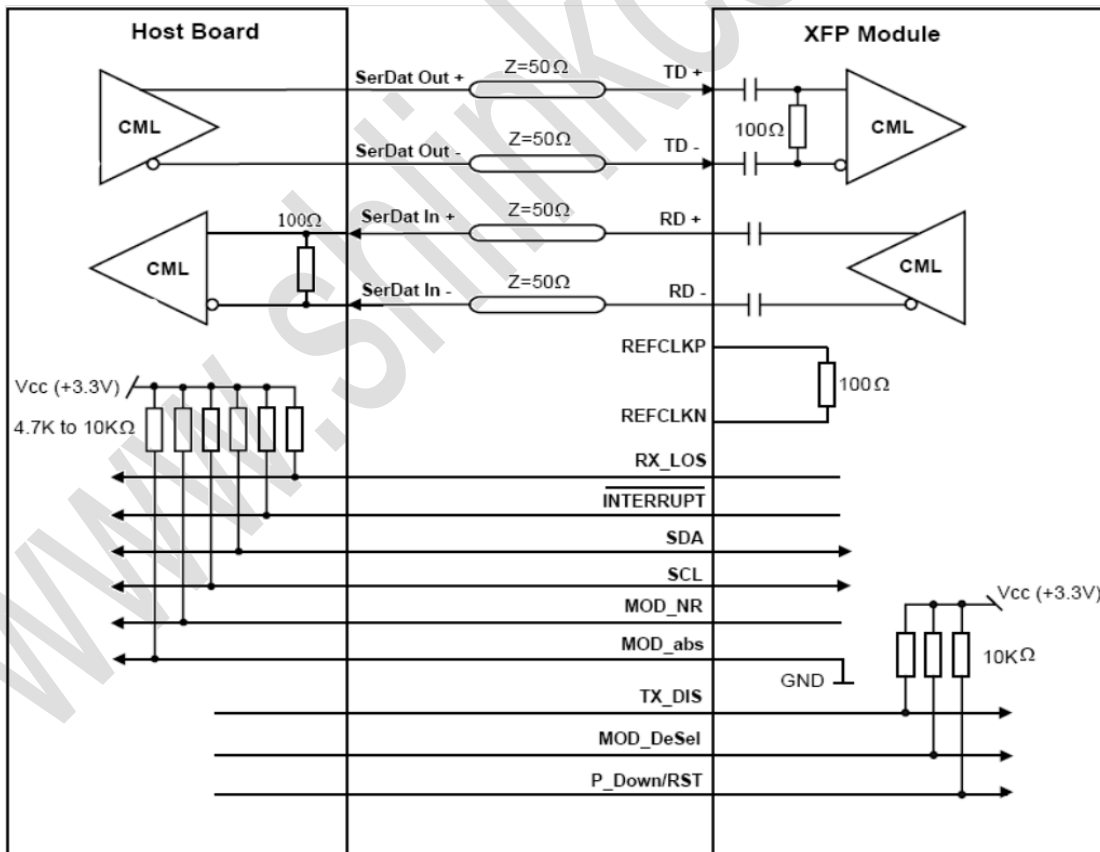

Recommended High-speed Interface Circuit

SH LINK CO., LIMITED

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China

Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613


Fax: +86-755-82891849

Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)

Website: [www.buysfp.com](http://www.buysfp.com)

[www.shlinkco.com](http://www.shlinkco.com)

➤ Mechanical Dimensions

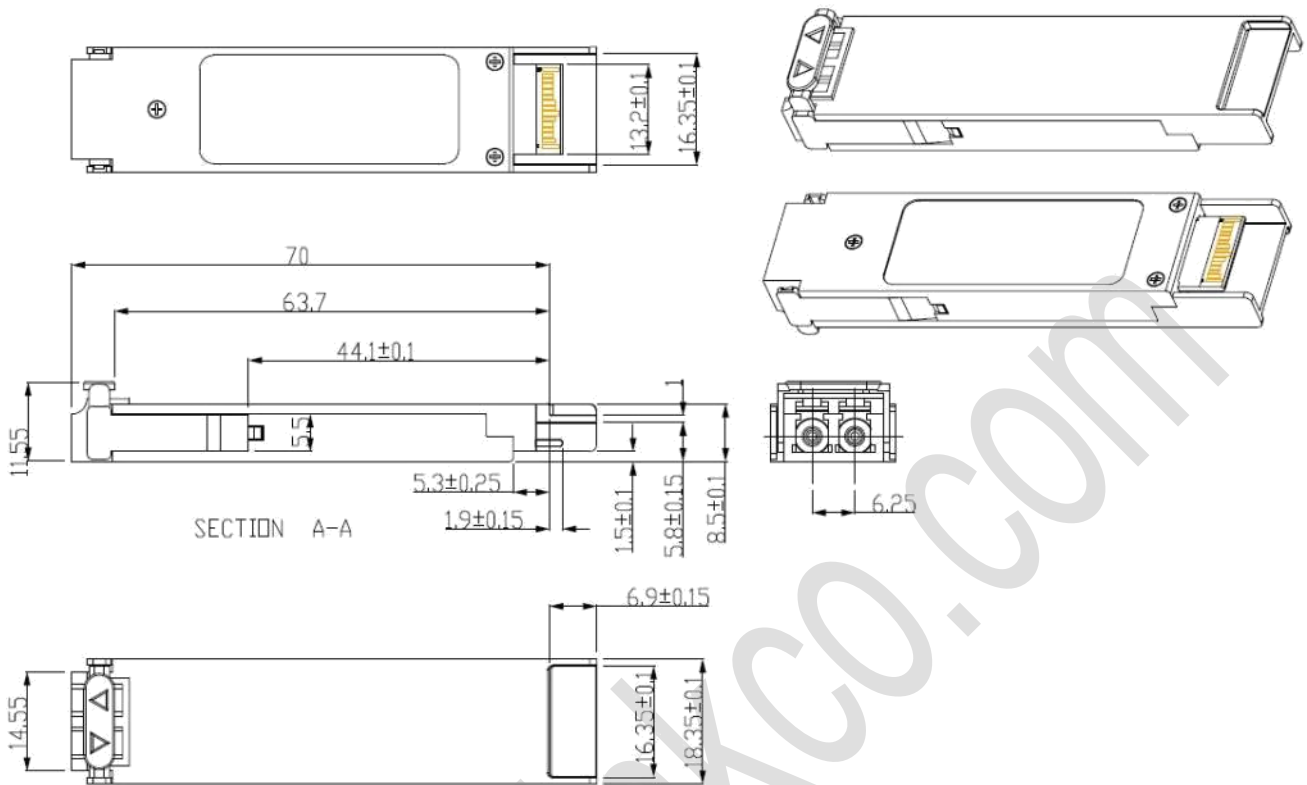

**SH LINK CO., LIMITED**

6/7F Yunfaqixiu Building, No.4 Meicun Road, Futian District, Shenzhen, 518000, China

Tel: +86-755-82891446, 83691556, 83100013, 83100029, 83224802, 23615613

Fax: +86-755-82891849

Email: [sales@shlinkco.com](mailto:sales@shlinkco.com)

Website: [www.buysfp.com](http://www.buysfp.com),

[www.shlinkco.com](http://www.shlinkco.com)